

1. Package Size:12.mm*15.0*1.0 H

2. Color:

COLOR	
Emitted	Lens
WHITE	CLEAR

3.Absolute Maximum Ratings:

Parameter	Symbol	Ratings	UNIT
ForwardCurrent	IF	1.2	A
Peak Forward Current Duty (1/10@0.1ms Pulse Width)	IFP	1.5	A
Reverse Voltage	VR	13	V
Storage Temperature	Tstg	-40~+85	°C
Operating Temperature	Topr	-40~+85	°C


※2 Power Dissipation : 1chips

※3 I_{FRM} Measurement condition : Pulse Width ≤ 2ms, Duty ≤ 1/5

4.Electro-Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	UNIT	CONDITION
Color Temperature	CCT	----	6000	----	K	IF=1.2A
Dominant Wavelength	λD	360	----	----	nm	IF=1.2A
Spectral Line Half-Width	Δλ1/2	----	20	----	nm	IF=1.2A
Forward Voltage	VF	----	11	----	V	IF=1.2A
Reverse Current	IR	----	----	10	uA	VR=13V
Luminous Intensity	Iv	1200	1400	----	LM	IF=1.2A
Viewing Angle	2θ 1/2	----	120	----	deg	IF=1.2A

PACKAGE DIMENSIONS

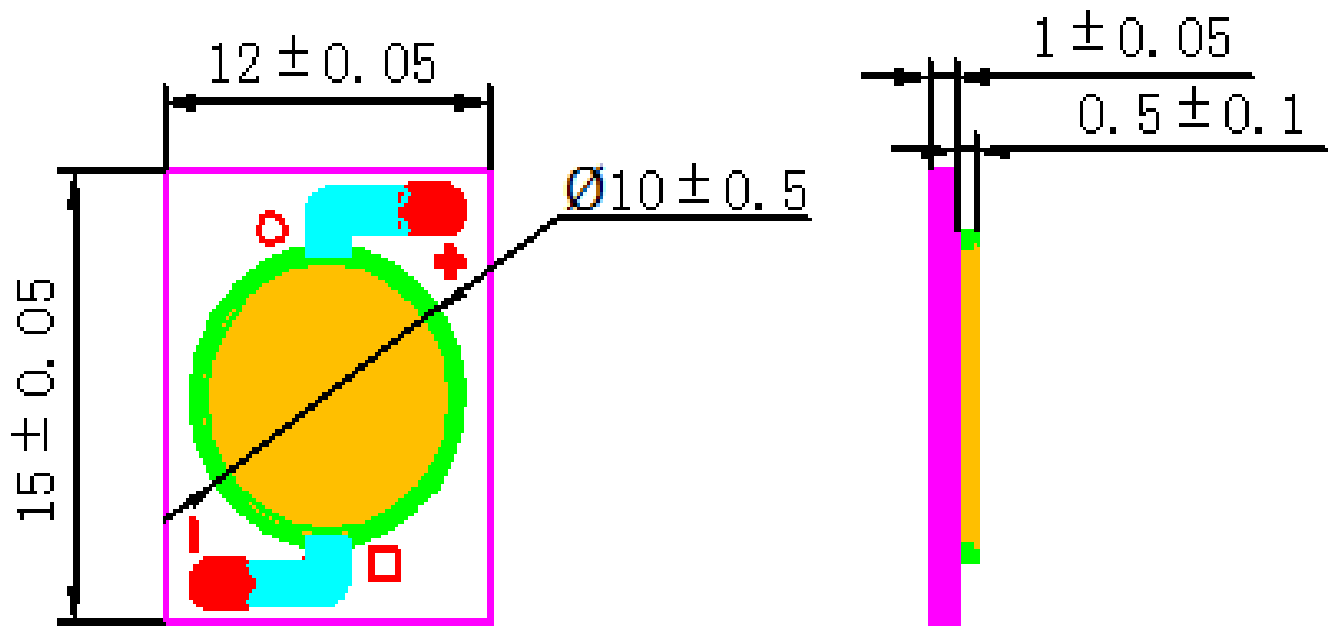

Notes :

1. Dimensions are in millimeters.
2. Tolerance is ± 0.25 mm without noted.

Precautions For Use LED

1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.

2.3 After opening the package: The LED's floor life is 168 Hrs under 30°C or less and 60% RH or less. If unused

LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment: 60±5°C for 24 hours.

3. Soldering Condition

Pb-free solder temperature profile

